


# Pluggable Terminal Blocks

3.5 mm Pitch, Closed Ended, horizontal

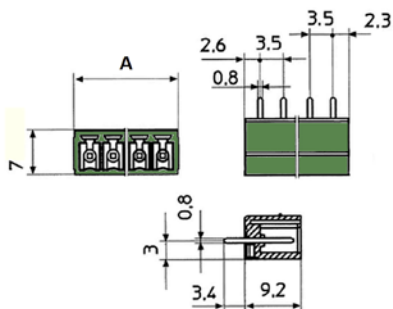

## FEATURES:

Closed ended

Closed headers

Polarised mouldings

Guided pin alignment

Pin/terminal - Tinned phosphor bronze

Rising clamp - Nickel copper flash brass

Screw/torque - M2 steel Tin plated, 0.3Nm

Recommended PCB hole size  $\varnothing$ 1.2 mm

cUL approved

## SPECIFICATION:

Gender of contacts

Male

Rated current to EN

10 A

Pitch

3.5 mm

Termination type

Solder Pin [PCB, Through-Hole]

Rated voltage to EN

200 V

Combustibility class

UL 94 V-0

Colour

green

Temperature range

-33...+120 °C

## PRODUCT RANGE:

Art. Nr.	Poles	A	Connection direction
RND 205-00111	2	8.4 mm	horizontal
RND 205-00112	3	11.9 mm	horizontal
RND 205-00113	4	15.4 mm	horizontal
RND 205-00114	5	18.9 mm	horizontal
RND 205-00115	6	22.4 mm	horizontal
RND 205-00117	8	29.4 mm	horizontal
RND 205-00118	9	32.9 mm	horizontal